

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
31 December 2003 (31.12.2003)


PCT

(10) International Publication Number
WO 2004/002086 A1

- (51) International Patent Classification⁷: **H04L 12/56**, 12/22, G06F 15/16
- (74) Agent: **ALBIHNS STOCKHOLM AB**; P.O. Box 5581, Linnégatan 2, S-114 85 Stockholm (SE).
- (21) International Application Number: **PCT/SE2003/001030**
- (22) International Filing Date: 18 June 2003 (18.06.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0201879-4 19 June 2002 (19.06.2002) SE
- (71) Applicant (for all designated States except US): **MAR-RATECH AB** [SE/SE]; P.O. Box 1036, S-164 21 Kista (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **PARNES, Peter** [SE/SE]; Granitstigen 12, S-977 54 Luleå (SE).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: APPARATUS AND METHOD FOR CONVEYING PRIVATE INFORMATION WITHIN A GROUP COMMUNICATION SYSTEM

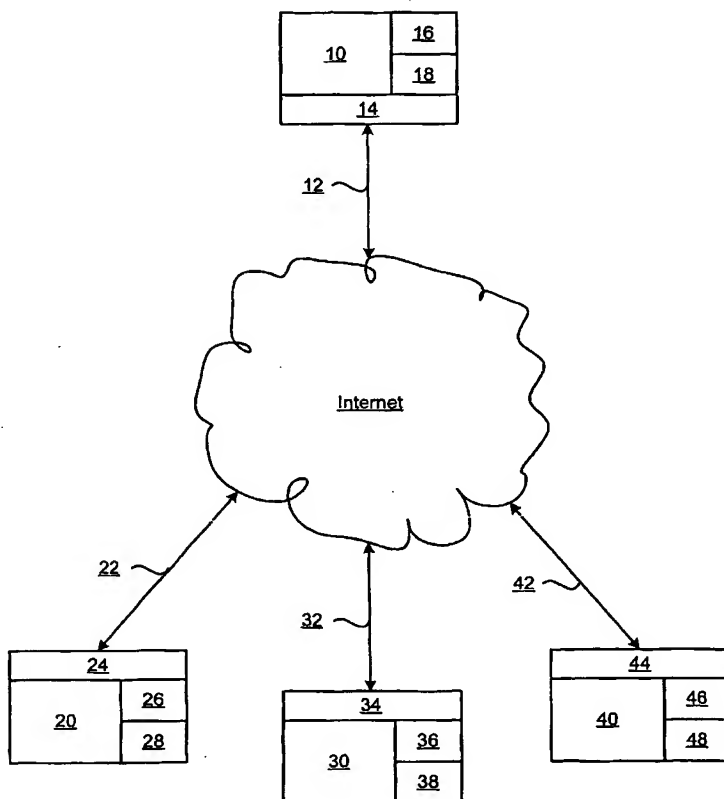

(57) Abstract: The present invention relates to an apparatus and method for distribution of a streamed signal within a group of users in a computer network, the users accessing client terminals (10, 20, 30, 40) for participation in a multicast session. The apparatus comprises connecting links (12, 22, 32, 42) adapted to connect the client terminals of users and related equipment, such as capturing means (16, 26...; 18, 28...), to the multicast session, preferably via the Internet or other interconnecting network. An extension header is added to data packets of the streamed signal, the extension header comprising identification data relating to the intended recipient of a packet. The invention is characterised in that a filtering means (14, 24, 34, 44) is associated with the receiving client adapted to filter out data packets having the address of the recipient and receiving the streamed signal. Consequently, the existing communication channel can be reused.



Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Apparatus and method for conveying private information within a group communication system

Technical field of the invention

5

The present invention relates to an apparatus and method for conveying private information within an established group communication. More in detail, the invention relates to communication between two parties within an established IP-multicast group where the group involves more than two participants.

10

Background of the invention

15

Media information can be distributed within a communicating group of users by means of so-called IP-multicast transmission. This multicast transmission technique relies on the principle that the information is transmitted to a multicast group and further copied in the network to participating parties who require a copy of the information.

20

Public information in a network of the above kind is distributed within the group of users by IP-multicast in the form of streamed media. However, there may be a need for distribution information of particular interest to only a sub-part of participating users, and distribute private messages exclusively within that sub-part of the participating group. According to prior art technology, in such a case a special communication channel is established between the sub-group members in parallel with the public multicast communication channel. However, network constraints, such as firewalls or other access limiting security arrangements may impede or even preclude transmission of non-multicast communication from reaching the intended recipient. This is a drawback associated with prior art, which limits the deployment of applications for group communication. Today, the trend in society is that measures are taken in the direction of enhanced security, and the security consciousness

30

among users and network administrators has increased. Therefore the need for an arrangement enabling communication, while simultaneously respecting network constraints and limitations, such as firewalls and other security measures, has become even greater than before.

5

Summary of the invention

It is therefore an object of the present invention to alleviate the previously mentioned shortcomings of prior art associated with group communication services. This is accomplished by an apparatus and method for distribution of a streamed signal within a group of users in a computer network, the users accessing client terminals for participation in a multicast session, the apparatus comprising,

10

connecting links adapted to connect the client terminals of users and related equipment, such as capturing means, to the multicast session, preferably via the Internet or other interconnecting network,

15

an extension header being added to data packets of the streamed signal, the extension header comprising identification data relating to the intended recipient of a packet,

characterised in that

20

a filtering means associated with the receiving client adapted to filter out data packets having the address of the recipient and receiving the streamed signal.

Only one copy of the information is transmitted from the sender independently of the amount of receivers. Within a multicast group, as previously described, there may be a need for transmitting private or confidential information exclusively within only a subpart of the group, usually transmission one to one. By means of additional encryption, there is a further possibility of making also strictly confidential information which is distributed accessible to only intended recipients. This could be critical information not to be disclosed to all parties in a business negotiation,

30

keys and solutions to problems during an electronic educational meeting, individual tuition during an electronic meeting being part of distance learning, foreign affairs or political relations, etc.

5 The present invention, which provides a solution to the mentioned distribution and confidentiality problem is advantageous in many ways. The previous need for establishing a dedicated unicast connection in parallel with the existing multicast connection is no longer necessary. Communication of non-public interest, possibly of private or sensitive nature, may be executed during a public session. The advantage
10 of the invention is hence the ability to reuse the existing communications channel while maintaining the confidentiality if this is desirable.

Due to network constraints it is desirable to send also this information using IP-multicast even though it will reach non-interested receivers. These network constraints include for example firewalls and other corresponding security arrangements
15 where the receiver might only have IP-multicast access or only access to a portal, i.e. a so-called reflector.

Brief description of the drawings

20 The features, objects, and further advantages of this invention will become apparent by reading this description in conjunction with the accompanying drawings, in which like reference numerals refer to like elements and in which:

25 Fig 1 illustrates a schematic overview of the apparatus for distribution of a streamed signal within a group of users according to the present invention.

Fig 2 is a signalling chart representing the content of a header added to distributed data packets according to the present invention.

Detailed description

The following description is of the best mode presently contemplated for practising the invention. The description is not to be taken in a limiting sense, but is made
5 merely for the purpose of describing the general principles of the invention. The scope of the invention should be ascertained with reference to the issued claims.

According to the present invention, the Internet is used as a means for distribution of streamed media. Use of the Internet is the optimal solution as long as it provides a
10 reliable connection having sufficient transmission rates, without network congestion problems. The invention does not lead to undesired overload within the computer networks with unnecessary amounts of raw data, and the raw data can be compressed to require even less transmission capacity. The amount of data distributed through the network is reduced, since the data stream sent as a copy from one client
15 terminal to other associated client terminals can be compressed, as a result of which the total amount of data transmitted over the network is reduced.

The implementation of the invention is based on addition of a special header to private packets being part of transmitted information in a network. The packets identify
20 the receivers and these packets are filtered on the receiving side of the distribution channel, although every participating member in a communication group actually receives the identifiable data. This is implemented in practice using a special header extension which is available in the Real-time Transport Protocol standard for identifying that header extensions actually exist in the packet.

25 The invention is not limited to any particular type of data but is applicable for any type of information transmitted, such as for audio, video, chat, etc.

With reference to Fig 1, a schematic overview illustrates the apparatus for distribution of a streamed signal within a group of users in a computer network. A plurality
30

of client terminals 10, 20, 30, 40 connected to a distributing globally connected computer network, such as the Internet via connecting links 12, 22, 32, 42. The connecting lines may be various wired connections, but likely for use already today or at least in a near future are also wireless transmission technologies, such as access technology based on infrared, Bluetooth or wireless-LAN. Connection means used in association with the present invention will be developing with new and emerging access technologies. To each host is coupled image capturing means 16, 26, 36, 46, preferably a so-called web-camera, a digital camera or a digital video camera. Moreover, audio capturing means 18, 28, 38, 48, in the form of a microphone arrangement is connected to each client terminal as well as filtering means 14, 24, 34, 44.

The client terminals themselves arrange the distribution of the data stream to other multicast group members. This is an autonomous function between client terminals as soon as the participants in a group are defined and authorised. There may be arranged a central administration entity, preferably in the form of a portal handling accessibility of users willing to participate in a multicast group of users. Necessary identification, authentication and authorisation of users to a group is carried out by means of the central administration entity, i.e. the portal interfacing between the entity and users, but a detailed description of those steps clearly goes beyond the scope of this application and is therefore omitted here.

With particular reference to Fig 2, parts of the previously mentioned Real-time Transfer Protocol (RTP) is depicted. The protocol comprises a part of the header called the extension bit. When this bit is determined, the normal RTP header is followed by a new RTP header extension having a content of at least 4 bytes of data. This new extension header is placed between the RTP header and the RTP payload, which contains the actual content to be distributed, such as for example the video stream of a multicast session.

The extension name is set to a common identifier, identifying this extension as a filter destination. In accordance with a preferred embodiment of the invention, the filter destination header is identified by the bytes numbered 77 and 65. The "length" field is the total length of the header extension including the first 4 bytes. Reference is here made to the RTP specification IETF RFC1889 (request for comments) where the first 4 bytes are defined. "v" which is found far left in Fig 2 defines two bits primarily intended for making changes possible within the header extension. "X" denotes an unused field in the header. "cmd" is a command that allows alternative use of the header extension. The reason for this possible alternative use is that a stream can only contain one RTP header extension per packet if it is to conform with the RTP specification. In this case the command cmd is set to 0. "dest number" is the number of destinations in this particular packet, which may be any number relating to the size of the sub-group of intended recipients. "real payload" is the type of data being sent in this packet. The real RTP header contains a payload type field and just as the case of other applications, there are not intended to be able to decode the data by leaving out the extension header. This extension header is originally set to the original value of 127. This number denotes, in accordance with the mentioned RTP specification, "unspecified" and then includes the real payload type. This will lead to applications that do not interpret this header extension to dispose of the packet. ID1, ID2, ... are the unique identifiers for the intended destination, i.e. who the intended recipient of this packet is.

Realisation of the addition of an extension header to a data packet can be carried out in accordance with the following embodiment. The sender is sending data to everybody in the group, the group by way of example comprising three users. There users are user1 (id=10), user2 (id=20) and user3 (id=30). For any reason, the sender of data may be interested in sending a data packet to only "user1" and "user3". This is denoted a private audio conversation, or a so-called whisper within the group communication. The new packet is composed with the header extension bit set to 1 and header extension is added after the RTP header as previously described with refer-

ence to Fig 2. This extension header will comprise "dest nummer" = 2 and "ID1" = 10 and "ID2" = 30. Subsequently a packet is sent to the whole group and is received by all three users (user1, user2 and user3). The second user, i.e. user2 will also receive this packet and decode the extension header but will not find itself in the destinations list and it will therefore dispose of the packet.

However, the other users, i.e. user1 and user3, will decode the extension header, find themselves in the destination list and handle the data according to the payload type defined in the "real payload" type field.

In accordance with the present invention, software is developed in parallel with the apparatus for distribution of signals. The software resides in a memory associated with said apparatus. The software is designed for instructing the hardware to carry out sequential method steps previously described in this application.

Claims

1. Apparatus for distribution of a streamed signal within a group of users in a computer network, the users accessing client terminals (10, 20, 30, 40) for participation in a multicast session, the apparatus comprising,

connecting links (12, 22, 32, 42) adapted to connect the client terminals of users and related equipment, such as capturing means (16, 26...; 18, 28...), to the multicast session, preferably via the Internet or other interconnecting network,

an extension header being added to data packets of the streamed signal, the extension header comprising identification data relating to the intended recipient of a packet,

characterised in that

a filtering means (14, 24, 34, 44) associated with the receiving client adapted to filter out data packets having the address of the recipient and receiving the streamed signal.

2. Apparatus for distribution of a streamed signal according to claim 1, **characterised in that**

the transmitted signal is encoded by the sending client terminal and decoded by the intended recipient only at the receiving client terminal by means of a separately provided decryption key.


3. Method for distributing a streamed signal via the Internet or other interconnecting network within a group of users in a computer network, the users accessing client terminals (10, 20, 30, 40) for participation in a multicast session, the method comprising the steps of,

adding an extension header to data packets of the streamed signal, the extension header identifying the intended recipient of a packet,

characterised by

filtering out data packets having identification data corresponding to the recipient and allowing them to pass through a filtering means (14, 24, 34, 44), which is associated with the receiving client.

- 5 4. Computer program product for distributing a streamed signal within a group of users in a computer network, the computer program product being integrated and transmissible between comprised units according to claims 1-2, and the computer program product being adapted for carrying out the method steps of claim 3.

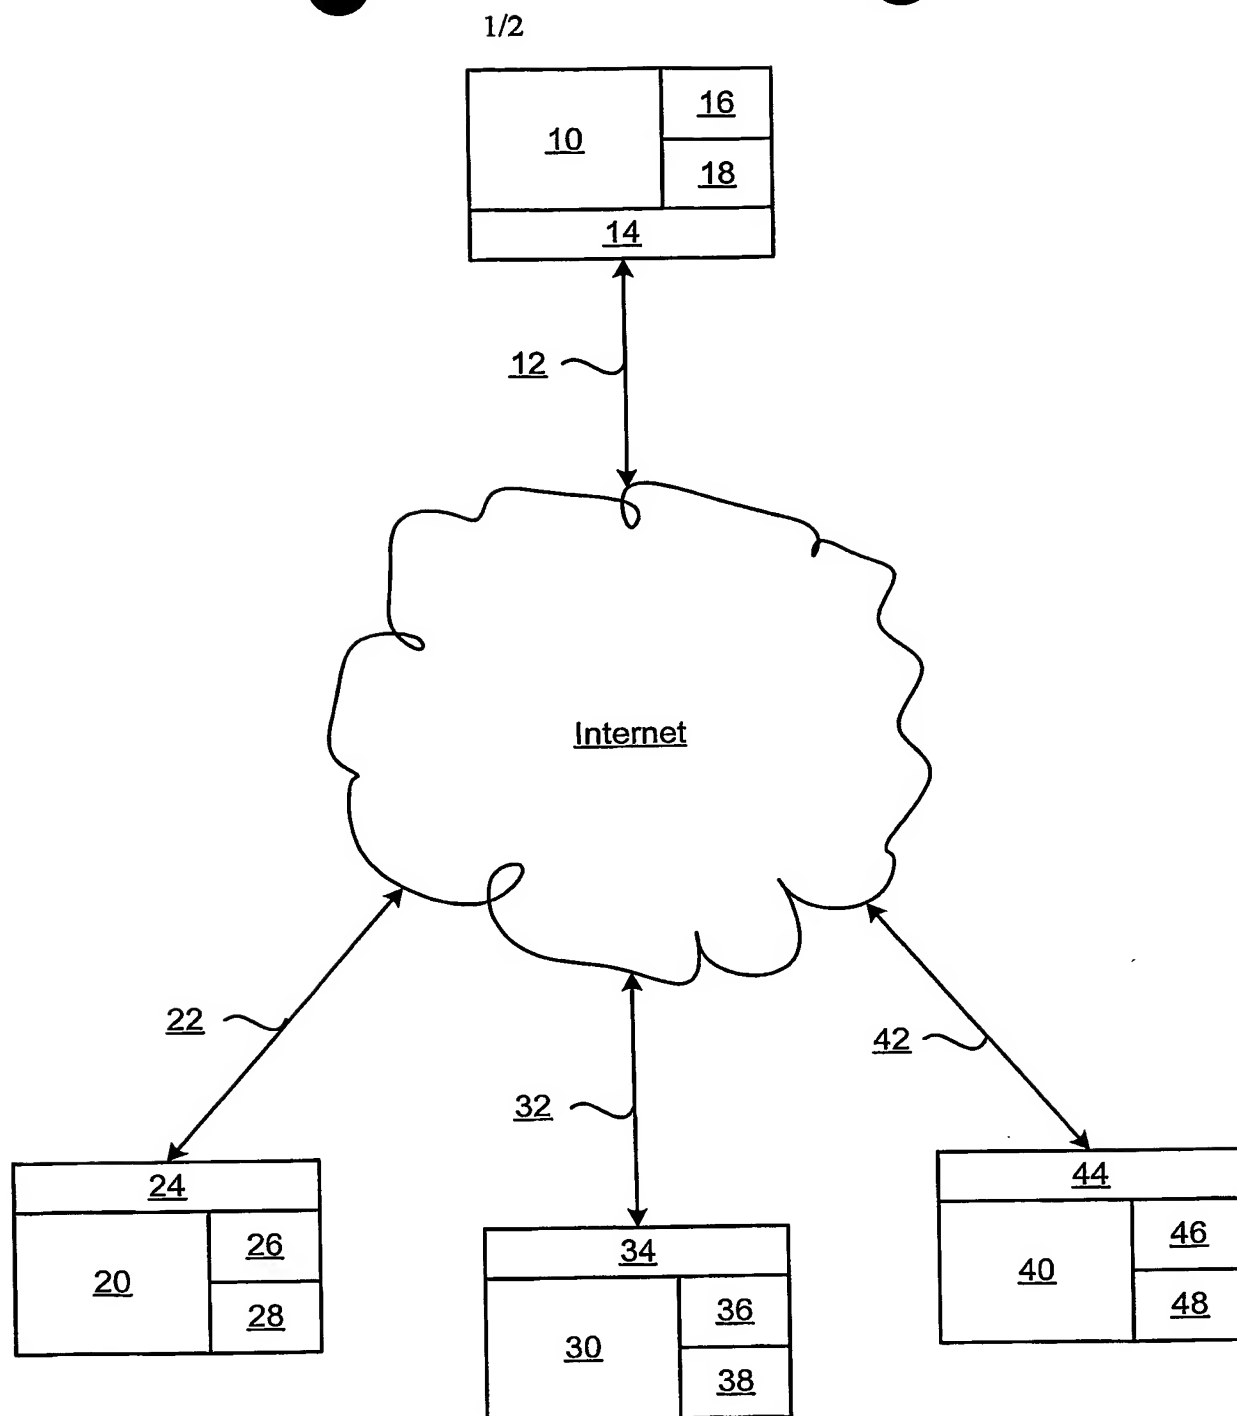**Fig 1**

2/2

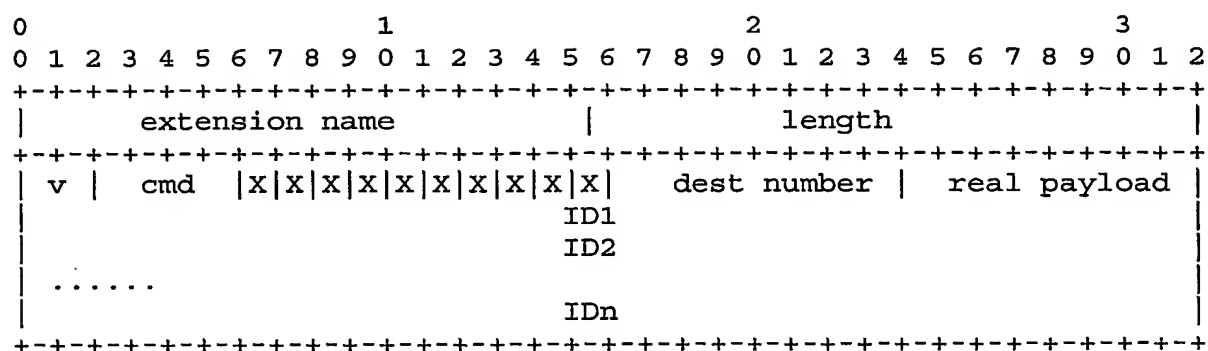


Fig 2

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 03/01030

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04L 12/56, H04L 12/22, G06F 15/16

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04L, H04B, H04Q, G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	Michael Smirnov et al "Programmable Group Communication Services over IP Multicast" High Performance Switching and Routing, 2000. ATM 2000. Proceedings of the IEEE Conference 26-29 June 2000 Page(s): 281-289 see abstract and section 2 "Value and services over IP Multicast" and section 3.5 "Messages" --	1-4
A	US 2002057663 A1 (BYUNG KEUN LIM), 16 May 2002 (16.05.02), see the summary of the invention --	1-4

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

25 August 2003

Date of mailing of the international search report

01-09-2003

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Markus Stålö/mj

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 03/01030

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	Brian Neil Levine et al "Improving Internet Multicast with Routing Labels" Network Protocols, 1997. Proceedings., 1997 28 -31 October 1997 Page(s): 241-250 see section 1 "Introduction" --	1-4
A	Kate Jenkins et al "A Gossip Protocol for Subgroup Multicast" Distributed Computing Systems Workshop. 2001 16-19 April 2001 Page(s): 25-30 see section 1 "Introduction" --	1-4
E,X	US 6490586 B1 (GERA GOFT ET AL), 3 December 2002 (03.12.02), figure 7, claims 1-7 -- -----	1-4

INTERNATIONAL SEARCH REPORT

Information on patent family members

26/07/03

International application No.

PCT/JP 03/01030

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
US	2002057663	A1	16/05/02	KR	2002037792 A	23/05/02
				KR	2002037793 A	23/05/02

US	6490586	B1	03/12/02	IL	137383 D	00/00/00
